


Heatsink Thermal Pads - Pack of 5

Product ID: HSFPHASECM

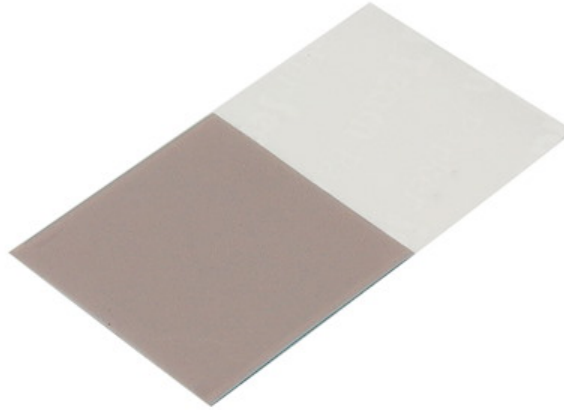

This 5 pack of Thermal Pads offers a suitable alternative to using heatsink paste/grease. The thermal pads remain solid at room temperature, and soften at heatsink operating temperatures - eliminating the mess of heat grease, while maximizing heat conduction to create a cooler operating environment for your hard working microcontrollers or chipset components.

Certifications, Reports and Compatibility

Applications

- Replaces traditional heatsink grease

Features

- Low thermal impedance
- Electrically non-conductive
- Solid at room temperature, it softens at heatsink operating temperatures
- Conforms to surface irregularities

Prominence

Warranty 2 Years

Description CDW 75 - 1st StarTech.com Heatsink Thermal Pads Thermal Pad - Heat Grease

Line

Performance

| | |
|----------------------|----------------------|
| Thermal Conductivity | 0.7 W/m-k |
| Thermal Resistance | 0.03 C-in/W @ 50 PSI |
| Specific Gravity | 1.11 |

Special Notes / Requirements

| | |
|------|---|
| Note | Heatsink/Component Clamping Pressure (Recommended): 5 to 100 PSI (0.035 to 0.690 MPa) |
|------|---|

Environmental

| | |
|-----------------------|-----------------------------|
| Operating Temperature | -60C to 125C (-76F to 257F) |
|-----------------------|-----------------------------|

Physical Characteristics

| | |
|-------------------|---|
| Color | Pink |
| Material | Steel |
| Materials | Phase Change Temperature: 58C<p>Volume Resistivity: 1x 10¹⁵ Ohm-cm</p> |
| Product Length | 1.2 in [30.0 mm] |
| Product Width | 1.2 in [30.0 mm] |
| Product Height | 0.0 in [0.1 mm] |
| Weight of Product | 0.2 oz [6.0 g] |

Packaging Information

| | |
|---------------------------|------------------|
| Package Quantity | 5 |
| Package Length | 4.9 in [12.5 cm] |
| Package Width | 3.5 in [90.0 mm] |
| Package Height | 0.1 in [2.0 mm] |
| Shipping (Package) Weight | 0.3 oz [8.0 g] |

What's in the Box



Included in Package

Thermal Pad

****Product appearance and specifications are subject to change without notice.***

